




Resistance Thermometer 热电阻温度计

- Measuring ranges from -50°C to 600°C
- Output signal: Pt100 in 2-, 3-, 4-wire circuit
- Exchangeable process probe
- With extension tube
- Process connection and sensor tube from 316
- Suitable for high pressure

- 测量范围从 -50°C 到 600°C
- 输出信号: 2、3、4 线制 Pt100
- 可更换测量探头
- 带延长管
- 过程连接和探杆均为 316 材质
- 适用于高压

Drawing / 尺寸图

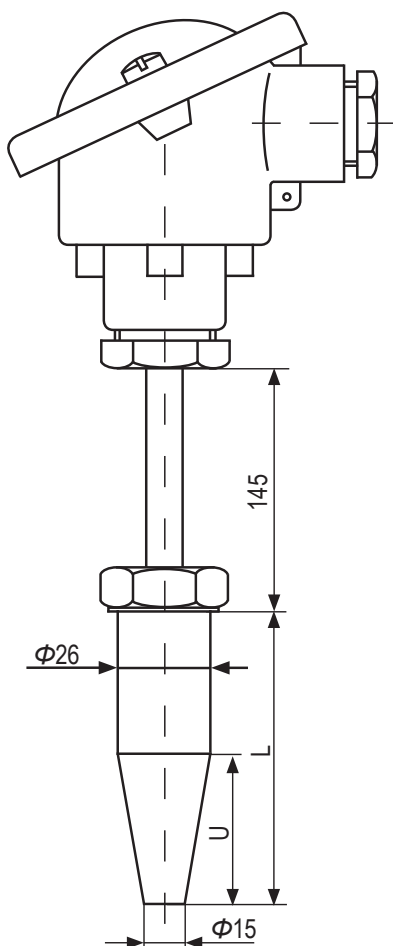

Legend / 图例:
L Insertion length / 插入深度
U Cone length / 锥体长度

Technical Specification / 技术规范		
Measuring range 测量范围	-50 ... +600	[°C]
Measuring element 测量元件	Pt100	
Measuring element tolerance value per IEC 60751 根据 IEC 60751 测量元件公差值	Class B, Class A B 级、A 级	
Accuracy @ 100°C 精度	~ 1 Kelvin ~ 1 开尔文	
Response time 响应时间	$t_{50} < 25$, $t_{90} < 66$	[S]
Inner- ϕ 内孔直径	6、8	[mm]
Cone length 锥体深度	65、125、275	[mm]
Sensor insertion length 传感器插入深度	110、140、170、200、260、400	[mm]
Process connection 过程连接	Weld 焊接	
Measuring insert 测量插入件	Replaceable 可更换	
Extension tube 延长管	145	[mm]
Material of process connection 过程连接材质	Stainless Steel 316 不锈钢 316	
Material of sensor tube 探杆材质	Stainless Steel 316 不锈钢 316	
Output signal 输出信号	Pt100	
Connection method 连接方法	2-wire, 3-wire, 4-wire 2 线制、3 线制、4 线制	
Measuring current 测量电流	0,1 ... 1,0	[mA]
Storage temperature 储存温度	-40 ... +125	[°C]
Ambient temperature 环境温度	-40 ... +125	[°C]
Electrical connection 电气连接	Type B to DIN 43729 符合 DIN 43729 标准 B 型接线盒	
Protection degree 防护等级	IP65	

Series 8423 / 8423 系列

Resistance Thermometer / 热电阻温度计

aumarg
SENSORS & CONTROLS

Specification key / 规格代码

8423 - [] - [] - [] - [] - [] - [] - []

Measuring range / 测量范围	
520	-50 ... 200 °C
540	-50 ... 400 °C
560	-50 ... 600 °C

Accuracy / 精度等级	
B	Class B / B 级
A	Class A / A 级

Connection method / 连接方法	
12	1 Pt100 × 2 - wire / 1 Pt100 × 2 线制
13	1 Pt100 × 3 - wire / 1 Pt100 × 3 线制
14	1 Pt100 × 4 - wire / 1 Pt100 × 4 线制
22	2 Pt100 × 2 - wire / 2 Pt100 × 2 线制
23	2 Pt100 × 3 - wire / 2 Pt100 × 3 线制

Inner-Φ / 内孔直径	
6	6 mm
8	8 mm

E-connection / 电气连接	
A	B (Aluminium) / B (铝)
B	BUZ (Aluminium) / BUZ (铝)
D	BUZ-H (Aluminium) / BUZ-H (铝)

Cone length / 锥体深度	
065	65 mm
125	125 mm
275	275 mm

Sensor insertion length / 插入深度	
110	110 mm
140	140 mm
170	170 mm
200	200 mm
260	260 mm
400	400 mm

Sample:

8423-560-B-12-8-200-125-A

Resistance thermometer
Type: 8423
Measuring range: -50 ... 600°C
Accuracy: Class B
Connection method: 1 Pt100 × 2-wire
Inner-Φ: 8 mm
Sensor insertion length: 200 mm
Cone length: 125 mm
Material of process connection: stainless steel 316
Material of sensor tube: stainless steel 316
Process connection: weld
E-connection: Type B to DIN 43729 (Aluminium)
Protection type: IP65

举例:

8423-560-B-12-8-200-125-A

热电阻温度计
型号: 8423
测量范围: -50 ... 600°C
精度等级: B 级
连接方法: 1 Pt100 × 2 线制
内孔直径: 6 mm
插入深度: 200 mm
锥体深度: 125 mm
接口材质: 不锈钢 316
探杆材质: 不锈钢 316
过程连接: 焊接
电气连接: 符合 DIN 43729 标准 B 型接线盒 (铝)
防护等级: IP65